


RANGE OF PERFORMANCE AT n= 29001/min

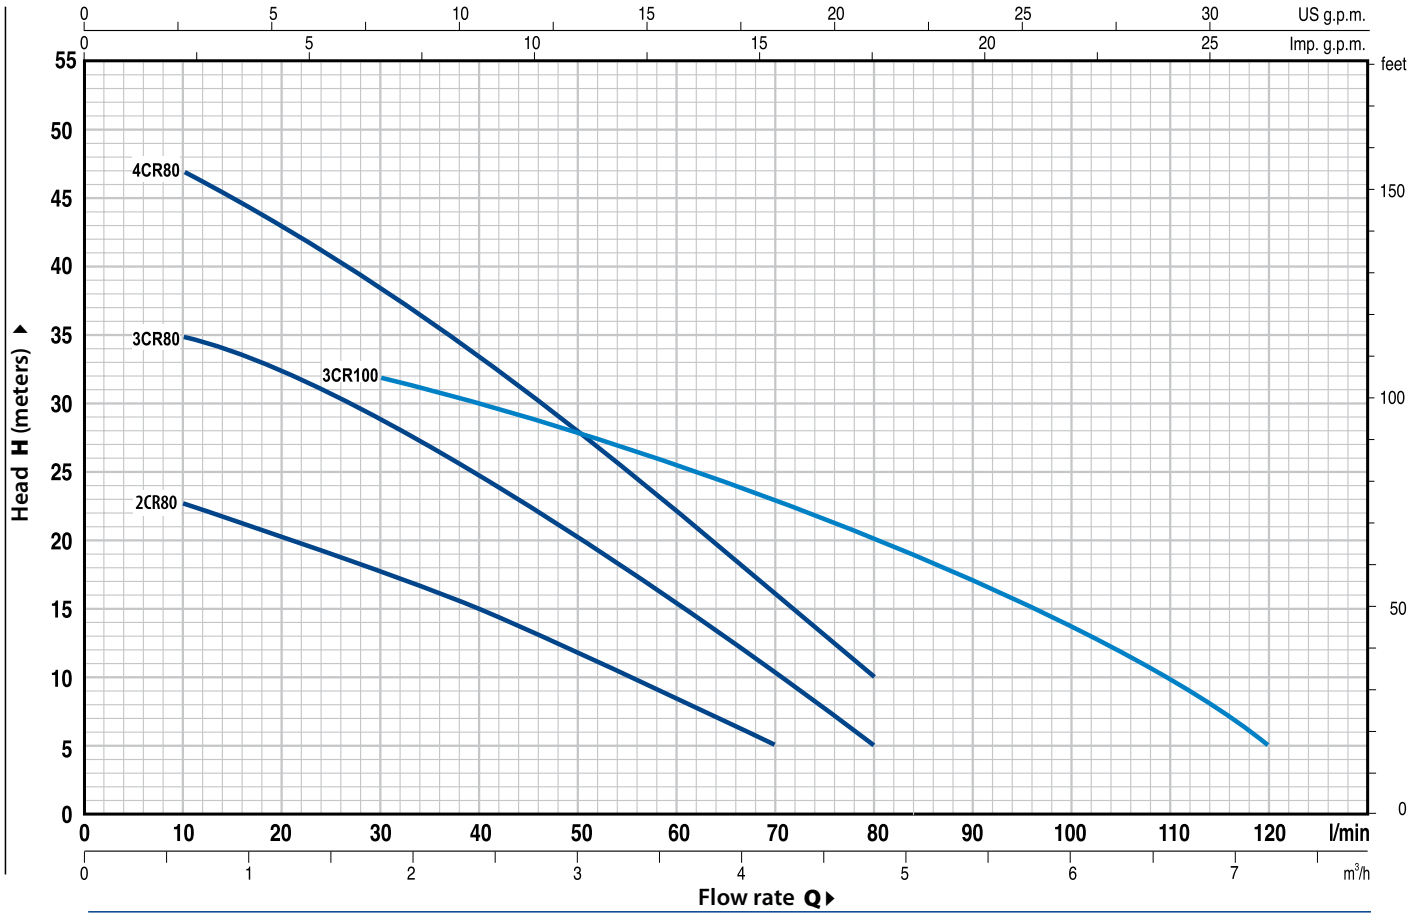

TYPE		POWER		Q	m³/h																
Single-phase	Three-phase	kW	HP		0	0.3	0.6	0.9	1.2	1.5	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0	6.6	7.2	
				l/min	0	5	10	15	20	25	30	40	50	60	70	80	90	100	110	120	
2CRm 80	-----	0.37	0.50	H meters	25	24	22.5	21.5	20	19	17.5	15	11.5	8	5						
3CRm 80	3CR 80	0.45	0.60		38	36	35	34	32.5	31	29	25	20	15.5	10	5					
4CRm 80	4CR 80	0.60	0.85		50	48	47	45	43	40.5	38.5	33.5	28	22.5	16	10					
3CRm 100	3CR 100	0.60	0.85		36	35.5	35	34	33.5	32.5	32	30	28	25.5	23	20	17	13.5	10	5	

Q = Flow rate H = Total manometric head

Performance curve tolerance values as per EN ISO 9906 App. A.

